SPECIFICATIONS

DESCRIPTION:

Dual head adjustable LED bollard.Suitable for wet/damp/dry location installations. One flood down and one flood up. Bollard may be configured for one or two heads. Bollard height may be specified at different lengths.

MATERIAL:

Standard overall material is 6061 aluminum.

SA - Powder Coat Satin Aluminum.
AP - Powder Coat Aluminum
BK - Powder Coat Black

BZ - Powder Coat Bronze

WT - Powder Coat White

LED OPTIONS:

Integral high output LED, warm white (3000K CCT) standard, others available.

3LED - 3 Watt LED

345 lumens output, each head. 11LED -11 Watt LED.

1075 lumens output, each head.

VOLTAGE:

120-277 - Integral universal driver.

HEIGHT:

25 - 25" **36** - 36"

MOUNTING:

Fixture is equipped with concrete mounting base and supplied with 3 J-bolt anchors.

ACCESSORIES:


SAMPLE ORDER SPECIFICATION: C02575-BZ-3LED-120-36


RATING:

TYPE:

Wet/damp/dry location.

MADE IN THE USA



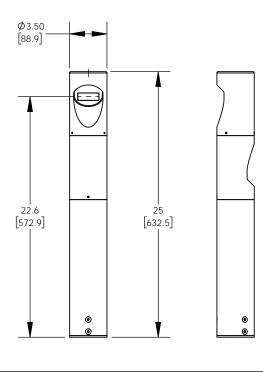



ORDER SPECIFICATION: _	·	·			
	Fixture	Finish	Optics	Voltage	Options/Access.
PROJECT:			(1) HEV	IEVI LITE, INC.	
APPROVED:			9714 Variel Ave, Chatsworth, CA 91311 Tel., (818) 341-8091 - Fax (818) 998-1986 Web Site http://www.hevilite.com		
NOTE:			CATALOG NUMBER:		